


Product Overview

- Expansion module for Building Automation Systems
- 16 Digital Inputs
- User friendly configuration
- Status LEDs for all inputs, outputs and communication
- RS-485 Connection as Modbus RTU Slave
- Slave ID and Baud-rate Configured with DIP Switches

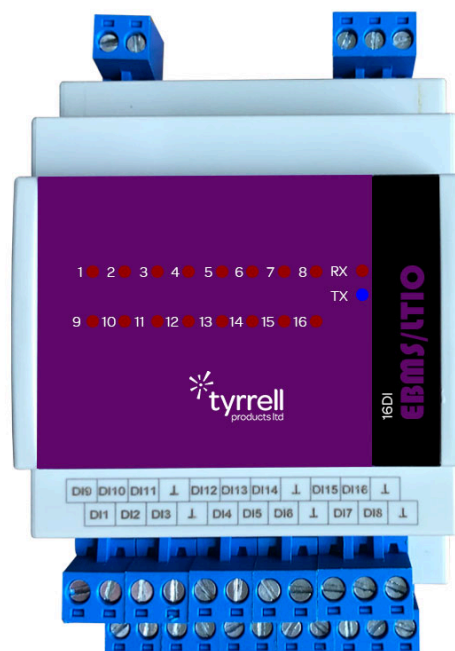

Specification

Nominal Voltage	24V AC/DC (+10%... -15%)
Input Configuration	DI (Volt Free Contact)
RS-485 Connection	Modbus RTU Slave
Ambiant Temperature Range	0... 50 °C (32... 122 °F)
Non-Operating Range	-25...+75°C (-13... +167 °F)
Humidity Range	5... 95 %rH, non-condensing
Weight	190g
Dimensions	70 x 124 x 59mm (Including Terminals)
Mounting	For 35mm DIN Rail Mounting
Degree of protection	IP20
Connections	Plug-in Terminals 1 x 2.5mm ²